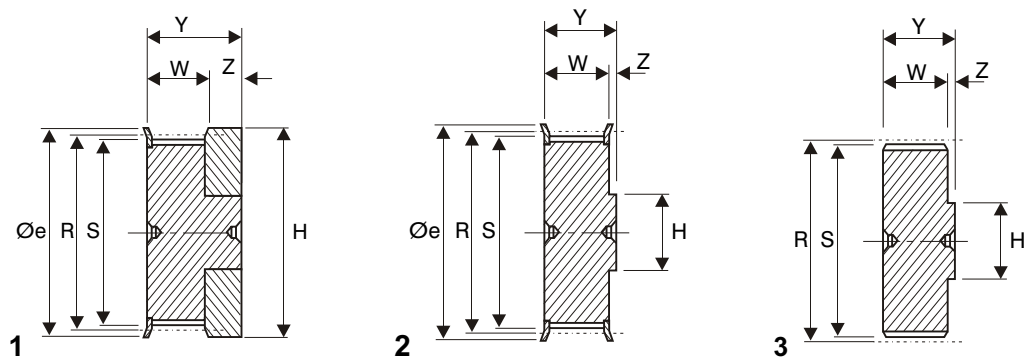


PDM 16 - T2,5 (Correa de 6 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
16 T2,5/12	12	1	9,00	12,0	6,5	9	16	con valona	Aluminio
16 T2,5/14	14	1	10,60	16,0	8,5	9	16		
16 T2,5/15	15	1	11,40	16,0	10,0	9	16		
16 T2,5/16	16	2	12,20	18,0	9,0	10	16		
16 T2,5/18	18	2	13,80	18,0	9,0	10	16		
16 T2,5/19	19	2	14,60	21,5	9,0	10	16		
16 T2,5/20	20	2	15,40	20,0	11,0	10	16		
16 T2,5/22	22	2	17,00	20,0	11,0	10	16		
16 T2,5/24	24	2	18,55	23,0	12,0	10	16		
16 T2,5/25	25	2	19,35	24,0	13,0	10	16		
16 T2,5/26	26	2	20,15	24,0	14,0	10	16		
16 T2,5/28	28	2	21,75	27,0	14,0	10	16		
16 T2,5/30	30	2	23,35	27,0	16,0	10	16		
16 T2,5/32	32	2	24,95	30,0	16,0	10	16		
16 T2,5/36	36	2	28,10	33,0	20,0	10	16		
16 T2,5/40	40	2	31,30	36,0	22,0	10	16		
16 T2,5/44	44	2	34,50	40,0	24,0	10	16		
16 T2,5/48	48	3	37,70	-	28,0	10	16		
16 T2,5/60	60	3	47,25	-	34,0	10	16		
								sin valona	

PDM 21 - T5 (Correa de 10 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
21 T5/10	10	2	15,05	18,0	8,0	15	21	con valona	Aluminio
21 T5/12	12	2	18,25	23,0	11,0	15	21		
21 T5/14	14	2	21,45	24,0	14,0	15	21		
21 T5/15	15	2	23,05	27,0	16,0	15	21		
21 T5/16	16	2	24,60	30,0	18,0	15	21		
21 T5/18	18	2	27,80	30,0	20,0	15	21		
21 T5/19	19	2	29,40	33,0	22,0	15	21		
21 T5/20	20	2	31,00	33,0	23,0	15	21		
21 T5/22	22	2	34,25	36,0	24,0	15	21		
21 T5/24	24	2	37,40	40,0	26,0	15	21		
21 T5/25	25	2	39,00	46,0	26,0	15	21		
21 T5/26	26	2	40,60	46,0	26,0	15	21		
21 T5/27	27	2	42,20	46,0	30,0	15	21		
21 T5/28	28	2	43,75	50,0	32,0	15	21		
21 T5/30	30	2	46,95	50,0	34,0	15	21		
21 T5/32	32	2	50,10	55,0	38,0	15	21		
21 T5/36	36	2	56,45	62,0	38,0	15	21		
21 T5/40	40	2	62,86	67,0	40,0	15	21		
21 T5/42	42	2	66,00	73,0	40,0	15	21		
21 T5/44	44	3	69,20	-	45,0	15	21		
21 T5/48	48	3	75,55	-	50,0	15	21		
21 T5/60	60	3	94,65	-	65,0	15	21		
								sin valona	


JOCAR TRANSMISIONES S.L.

c/Lezeaga, 4 48002 Bilbao

Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com


 e-mail: jocar@jocartransmisiones.com

PDM 27 - T5 (Correa de 16 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material	
27 T5/10	10	2	15,05	18,0	8,0	21	27	comoraletrana	Aluminio	
27 T5/12	12	2	18,25	23,0	11,0	21	27			
27 T5/14	14	2	21,45	24,0	14,0	21	27			
27 T5/15	15	2	23,05	27,0	16,0	21	27			
27 T5/16	16	2	24,60	30,0	18,0	21	27			
27 T5/18	18	2	27,80	30,0	20,0	21	27			
27 T5/19	19	2	29,40	33,0	22,0	21	27			
27 T5/20	20	2	31,00	33,0	23,0	21	27			
27 T5/22	22	2	34,25	36,0	24,0	21	27			
27 T5/24	24	2	37,40	40,0	26,0	21	27			
27 T5/25	25	2	39,00	46,0	26,0	21	27			
27 T5/26	26	2	40,60	46,0	26,0	21	27			
27 T5/27	27	2	42,20	46,0	30,0	21	27			
27 T5/28	28	2	43,75	50,0	32,0	21	27			
27 T5/30	30	2	46,95	50,0	34,0	21	27			
27 T5/32	32	2	50,10	55,0	38,0	21	27			
27 T5/36	36	2	56,45	62,0	38,0	21	27			
27 T5/40	40	2	62,86	67,0	40,0	21	27			
27 T5/42	42	2	66,00	73,0	40,0	21	27			
27 T5/44	44	3	69,20	-	45,0	21	27			
27 T5/48	48	3	75,55	-	50,0	21	27			
27 T5/60	60	3	94,65	-	65,0	21	27			
								sin valona		

PDM 36 - T5 (Correa de 25 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material	
36 T5/10	10	2	15,05	18,0	8,0	30	36	comoraletrana	Aluminio	
36 T5/12	12	2	18,25	23,0	11,0	30	36			
36 T5/14	14	2	21,45	24,0	14,0	30	36			
36 T5/15	15	2	23,05	27,0	16,0	30	36			
36 T5/16	16	2	24,60	30,0	18,0	30	36			
36 T5/18	18	2	27,80	30,0	20,0	30	36			
36 T5/19	19	2	29,40	33,0	22,0	30	36			
36 T5/20	20	2	31,00	33,0	23,0	30	36			
36 T5/22	22	2	34,25	36,0	24,0	30	36			
36 T5/24	24	2	37,40	40,0	26,0	30	36			
36 T5/25	25	2	39,00	46,0	26,0	30	36			
36 T5/26	26	2	40,60	46,0	26,0	30	36			
36 T5/27	27	2	42,20	46,0	30,0	30	36			
36 T5/28	28	2	43,75	50,0	32,0	30	36			
36 T5/30	30	2	46,95	50,0	34,0	30	36			
36 T5/32	32	2	50,10	55,0	38,0	30	36			
36 T5/36	36	2	56,45	62,0	38,0	30	36			
36 T5/40	40	2	62,86	67,0	40,0	30	36			
36 T5/42	42	2	66,00	73,0	40,0	30	36			
36 T5/44	44	3	69,20	-	45,0	30	36			
36 T5/48	48	3	75,55	-	50,0	30	36			
36 T5/60	60	3	94,65	-	65,0	30	36			
								sin valona		

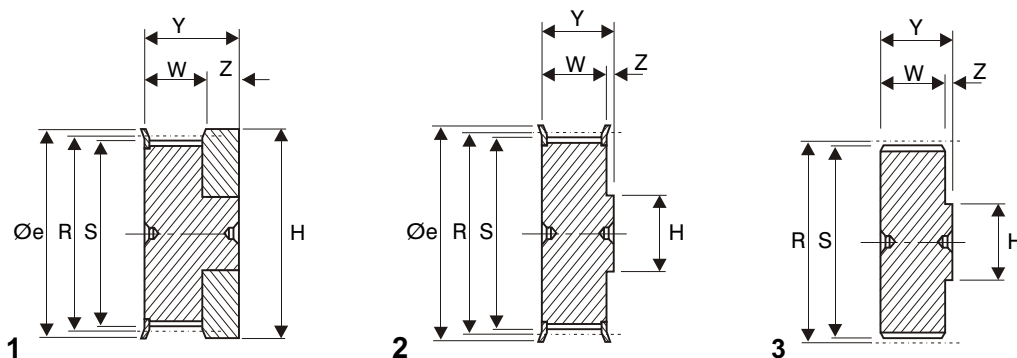
JOCAR TRANSMISIONES S.L.

c/Lezeaga, 4 48002 Bilbao


Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com

 e-mail: jocar@jocartransmisiones.com

PDM 31 - T10 (Correa de 16 mm.)									
Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
31 T10/12	12	2	36,35	40,0	28,0	21	31	con valona	Aluminio
31 T10/14	14	2	42,70	46,0	32,0	21	31		
31 T10/15	15	2	45,90	50,0	32,0	21	31		
31 T10/16	16	2	49,05	55,0	35,0	21	31		
31 T10/18	18	2	55,45	62,0	40,0	21	31		
31 T10/19	19	2	58,60	67,0	44,0	21	31		
31 T10/20	20	2	61,80	67,0	46,0	21	31		
31 T10/22	22	2	68,15	73,0	52,0	21	31		
31 T10/24	24	2	74,55	80,0	58,0	21	31		
31 T10/25	25	2	77,70	84,0	60,0	21	31		
31 T10/26	26	2	80,90	88,0	60,0	21	31		
31 T10/27	27	2	84,10	88,0	60,0	21	31		
31 T10/28	28	2	87,25	94,0	60,0	21	31		
31 T10/30	30	2	93,65	98,0	60,0	21	31		
31 T10/32	32	2	100,00	108,0	65,0	21	31		
31 T10/36	36	2	112,75	118,0	70,0	21	31		
31 T10/40	40	4	125,45	129,0	80,0	21	31		
31 T10/44	44	5	138,20	-	88,0	21	31		
31 T10/48	48	5	150,95	-	95,0	21	31		
31 T10/60	60	5	189,10	-	110,0	21	31		

PDM 40 - T10 (Correa de 25 mm.)									
Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
40 T10/12	12	2	36,35	40,0	28,0	30	40	con valona	Aluminio
40 T10/14	14	2	42,70	46,0	32,0	30	40		
40 T10/15	15	2	45,90	50,0	32,0	30	40		
40 T10/16	16	2	49,05	55,0	35,0	30	40		
40 T10/18	18	2	55,45	62,0	40,0	30	40		
40 T10/19	19	2	58,60	67,0	44,0	30	40		
40 T10/20	20	2	61,80	67,0	46,0	30	40		
40 T10/22	22	2	68,15	73,0	52,0	30	40		
40 T10/24	24	2	74,55	80,0	58,0	30	40		
40 T10/25	25	2	77,70	84,0	60,0	30	40		
40 T10/26	26	2	80,90	88,0	60,0	30	40		
40 T10/27	27	2	84,10	88,0	60,0	30	40		
40 T10/28	28	2	87,25	94,0	60,0	30	40		
40 T10/30	30	2	93,65	98,0	60,0	30	40		
40 T10/32	32	2	100,00	108,0	65,0	30	40		
40 T10/36	36	2	112,75	118,0	70,0	30	40		
40 T10/40	40	4	125,45	129,0	80,0	30	40		
40 T10/44	44	5	138,20	-	88,0	30	40		
40 T10/48	48	5	150,95	-	95,0	30	40		
40 T10/60	60	5	189,10	-	110,0	30	40		

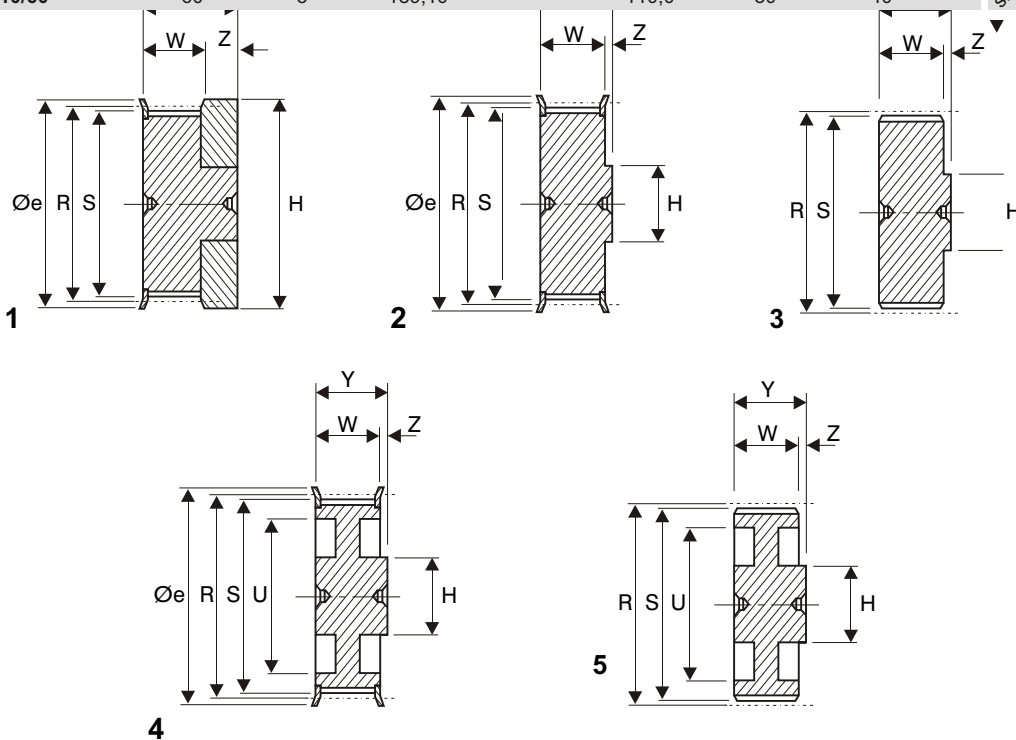


JOCAR TRANSMISIONES S.L.
 c/Lezeaga, 4 48002 Bilbao
 Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com

e-mail: jocar@jocartransmisiones.com

PDM 47 - T10 (Correa de 32 mm.)									
Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
47 T10/18	18	2	55,45	62,0	40,0	37	47	con valona	Aluminio
47 T10/19	19	2	58,60	67,0	44,0	37	47		
47 T10/20	20	2	61,80	67,0	46,0	37	47		
47 T10/22	22	2	68,15	73,0	52,0	37	47		
47 T10/24	24	2	74,55	80,0	58,0	37	47		
47 T10/25	25	2	77,70	84,0	60,0	37	47		
47 T10/26	26	2	80,90	88,0	60,0	37	47		
47 T10/27	27	2	84,10	88,0	60,0	37	47		
47 T10/28	28	2	87,25	94,0	60,0	37	47		
47 T10/30	30	2	93,65	98,0	60,0	37	47		
47 T10/32	32	2	100,00	108,0	65,0	37	47		
47 T10/36	36	2	112,75	118,0	70,0	37	47		
47 T10/40	40	4	125,45	129,0	80,0	37	47		
47 T10/44	44	5	138,20	-	88,0	37	47		
47 T10/48	48	5	150,95	-	95,0	37	47		
47 T10/60	60	5	189,10	-	110,0	37	47		
								sin valona	

PDM 66 - T10 (Correa de 50 mm.)									
Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
66 T10/18	18	2	55,45	62,0	40,0	56	66	con valona	Aluminio
66 T10/19	19	2	58,60	67,0	44,0	56	66		
66 T10/20	20	2	61,80	67,0	46,0	56	66		
66 T10/22	22	2	68,15	73,0	52,0	56	66		
66 T10/24	24	2	74,55	80,0	58,0	56	66		
66 T10/25	25	2	77,70	84,0	60,0	56	66		
66 T10/26	26	2	80,90	88,0	60,0	56	66		
66 T10/27	27	2	84,10	88,0	60,0	56	66		
66 T10/28	28	2	87,25	94,0	60,0	56	66		
66 T10/30	30	2	93,65	98,0	60,0	56	66		
66 T10/32	32	2	100,00	108,0	65,0	56	66		
66 T10/36	36	2	112,75	118,0	70,0	56	66		
66 T10/40	40	4	125,45	129,0	80,0	56	66		
66 T10/44	44	5	138,20	-	88,0	56	66		
66 T10/48	48	5	150,95	-	95,0	56	66		
66 T10/60	60	5	189,10	-	110,0	56	66		
								sin valona	

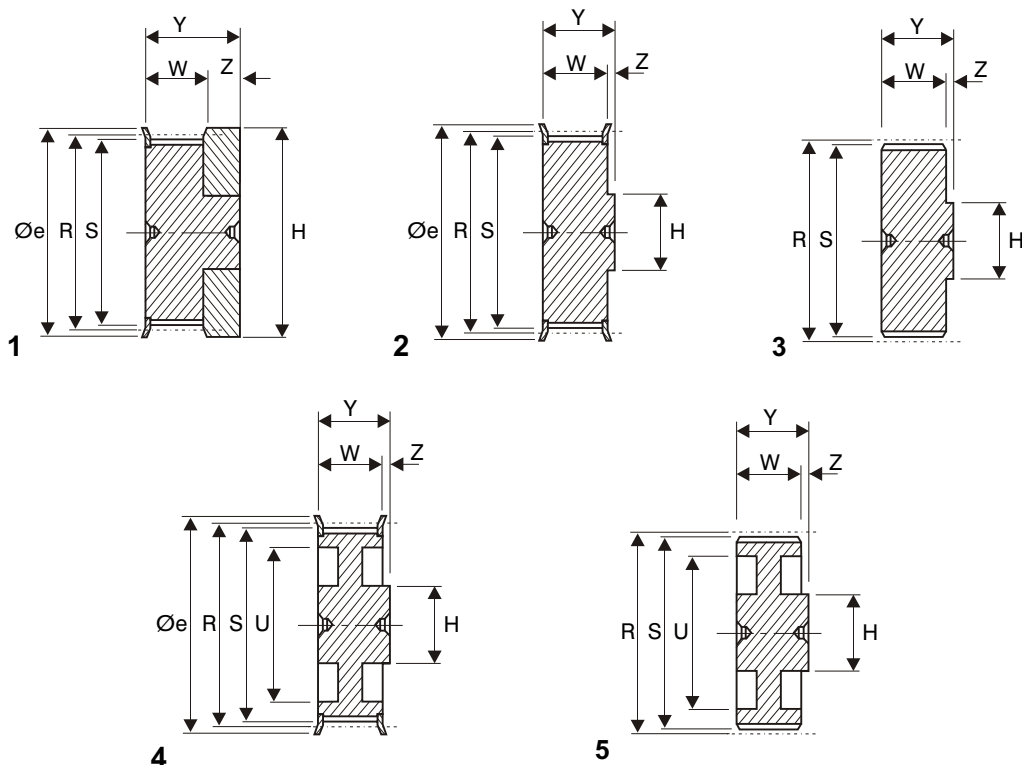

JOCAR TRANSMISIONES S.L.

c/Lezeaga, 4 48002 Bilbao

Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com


e-mail: jocar@jocartransmisiones.com

PDM 21 - AT5 (Correa de 10 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
21 AT5/12	12	2	17,85	23,0	11,0	15	21	con valona	Aluminio
21 AT5/14	14	2	21,05	24,0	14,0	15	21		
21 AT5/15	15	2	22,65	27,0	16,0	15	21		
21 AT5/16	16	2	24,20	30,0	18,0	15	21		
21 AT5/18	18	2	27,40	30,0	20,0	15	21		
21 AT5/19	19	2	29,00	33,0	22,0	15	21		
21 AT5/20	20	2	30,60	33,0	23,0	15	21		
21 AT5/22	22	2	33,85	36,0	24,0	15	21		
21 AT5/24	24	2	37,00	40,0	26,0	15	21		
21 AT5/25	25	2	38,60	46,0	26,0	15	21		
21 AT5/26	26	2	40,20	46,0	26,0	15	21		
21 AT5/27	27	2	41,80	46,0	30,0	15	21		
21 AT5/28	28	2	43,35	50,0	32,0	15	21		
21 AT5/30	30	2	46,55	50,0	34,0	15	21		
21 AT5/32	32	2	49,70	55,0	38,0	15	21		
21 AT5/36	36	2	56,05	62,0	38,0	15	21		
21 AT5/40	40	2	62,45	67,0	40,0	15	21		
21 AT5/42	42	2	65,60	73,0	40,0	15	21		
21 AT5/44	44	3	68,80	-	45,0	15	21		
21 AT5/48	48	3	75,15	-	50,0	15	21		
21 AT5/60	60	3	94,25	-	65,0	15	21		
								sin valona	

PDM 27 - AT5 (Correa de 16 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
27 AT5/12	12	2	17,85	23,0	11,0	21	27	con valona	Aluminio
27 AT5/14	14	2	21,05	24,0	14,0	21	27		
27 AT5/15	15	2	22,65	27,0	16,0	21	27		
27 AT5/16	16	2	24,20	30,0	18,0	21	27		
27 AT5/18	18	2	27,40	30,0	20,0	21	27		
27 AT5/19	19	2	29,00	33,0	22,0	21	27		
27 AT5/20	20	2	30,60	33,0	23,0	21	27		
27 AT5/22	22	2	33,85	36,0	24,0	21	27		
27 AT5/24	24	2	37,00	40,0	26,0	21	27		
27 AT5/25	25	2	38,60	46,0	26,0	21	27		
27 AT5/26	26	2	40,20	46,0	26,0	21	27		
27 AT5/27	27	2	41,80	46,0	30,0	21	27		
27 AT5/28	28	2	43,35	50,0	32,0	21	27		
27 AT5/30	30	2	46,55	50,0	34,0	21	27		
27 AT5/32	32	2	49,70	55,0	38,0	21	27		
27 AT5/36	36	2	56,05	62,0	38,0	21	27		
27 AT5/40	40	2	62,45	67,0	40,0	21	27		
27 AT5/42	42	2	65,60	73,0	40,0	21	27		
27 AT5/44	44	3	68,80	-	45,0	21	27		
27 AT5/48	48	3	75,15	-	50,0	21	27		
27 AT5/60	60	3	94,25	-	65	21	27		
								sin valona	

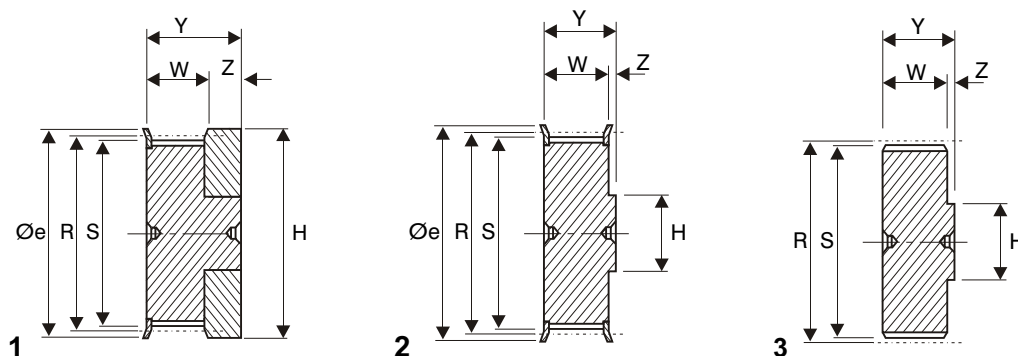
JOCAR TRANSMISIONES S.L.

c/Lezeaga, 4 48002 Bilbao


Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com

 e-mail: jocar@jocartransmisiones.com

PDM 36 - AT5 (Correa de 25 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
36 AT5/12	12	2	17,85	23,0	11,0	30	36	con valona	Aluminio
36 AT5/14	14	2	21,05	24,0	14,0	30	36		
36 AT5/15	15	2	22,65	27,0	16,0	30	36		
36 AT5/16	16	2	24,20	30,0	18,0	30	36		
36 AT5/18	18	2	27,40	30,0	20,0	30	36		
36 AT5/19	19	2	29,00	33,0	22,0	30	36		
36 AT5/20	20	2	30,60	33,0	23,0	30	36		
36 AT5/22	22	2	33,85	36,0	24,0	30	36		
36 AT5/24	24	2	37,00	40,0	26,0	30	36		
36 AT5/25	25	2	38,60	46,0	26,0	30	36		
36 AT5/26	26	2	40,20	46,0	26,0	30	36		
36 AT5/27	27	2	41,80	46,0	30,0	30	36		
36 AT5/28	28	2	43,35	50,0	32,0	30	36		
36 AT5/30	30	2	46,55	50,0	34,0	30	36		
36 AT5/32	32	2	49,70	55,0	38,0	30	36		
36 AT5/36	36	2	56,05	62,0	38,0	30	36		
36 AT5/40	40	2	62,45	67,0	40,0	30	36		
36 AT5/42	42	2	65,60	73,0	40,0	30	36		
36 AT5/44	44	3	68,80	-	45,0	30	36		
36 AT5/48	48	3	75,15	-	50,0	30	36		
36 AT5/60	60	3	94,25	-	65	30	36	sin valona	

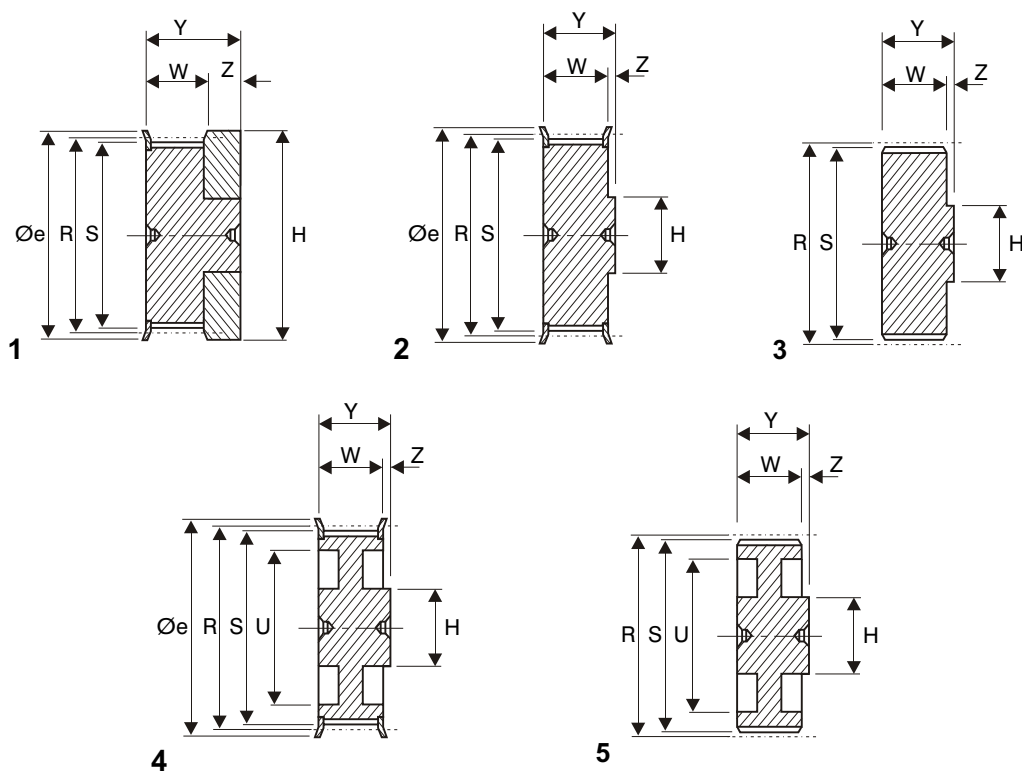

JOCAR TRANSMISIONES S.L.

c/Lezeaga, 4 48002 Bilbao

Tif 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com


e-mail: jocar@jocartransmisiones.com

PDM 31 - AT10 (Correa de 16 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
31 AT10/15	15	2	45,90	50,0	32,0	21	31	con valona	Aluminio
31 AT10/16	16	2	49,05	55,0	35,0	21	31		
31 AT10/18	18	2	55,45	62,0	40,0	21	31		
31 AT10/19	19	2	58,60	67,0	44,0	21	31		
31 AT10/20	20	2	61,80	67,0	46,0	21	31		
31 AT10/22	22	2	68,15	73,0	52,0	21	31		
31 AT10/24	24	2	74,55	80,0	58,0	21	31		
31 AT10/25	25	2	77,70	84,0	60,0	21	31		
31 AT10/26	26	2	80,90	88,0	60,0	21	31		
31 AT10/27	27	2	84,10	88,0	60,0	21	31		
31 AT10/28	28	2	87,25	94,0	60,0	21	31		
31 AT10/30	30	2	93,65	98,0	60,0	21	31		
31 AT10/32	32	2	100,00	108,0	65,0	21	31		
31 AT10/36	36	2	112,00	118,0	70,0	21	31		
31 AT10/40	40	4	125,45	129,0	80,0	21	31		
31 AT10/44	44	5	138,00	-	88,0	21	31		
31 AT10/48	48	5	150,95	-	95,0	21	31		
31 AT10/60	60	5	189,10	-	110,0	21	31		

PDM 40 - AT10 (Correa de 25 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
40 AT10/15	15	2	45,90	50,0	32,0	30	40	con valona	Aluminio
40 AT10/16	16	2	49,05	55,0	35,0	30	40		
40 AT10/18	18	2	55,45	62,0	40,0	30	40		
40 AT10/19	19	2	58,60	67,0	44,0	30	40		
40 AT10/20	20	2	61,80	67,0	46,0	30	40		
40 AT10/22	22	2	68,15	73,0	52,0	30	40		
40 AT10/24	24	2	74,55	80,0	58,0	30	40		
40 AT10/25	25	2	77,70	84,0	60,0	30	40		
40 AT10/26	26	2	80,90	88,0	60,0	30	40		
40 AT10/27	27	2	84,10	88,0	60,0	30	40		
40 AT10/28	28	2	87,25	94,0	60,0	30	40		
40 AT10/30	30	2	93,65	98,0	60,0	30	40		
40 AT10/32	32	2	100,00	108,0	65,0	30	40		
40 AT10/36	36	2	112,00	118,0	70,0	30	40		
40 AT10/40	40	4	125,45	129,0	80,0	30	40		
40 AT10/44	44	5	138,00	-	88,0	30	40		
40 AT10/48	48	5	150,95	-	95,0	30	40		
40 AT10/60	60	5	189,10	-	110,0	30	40		

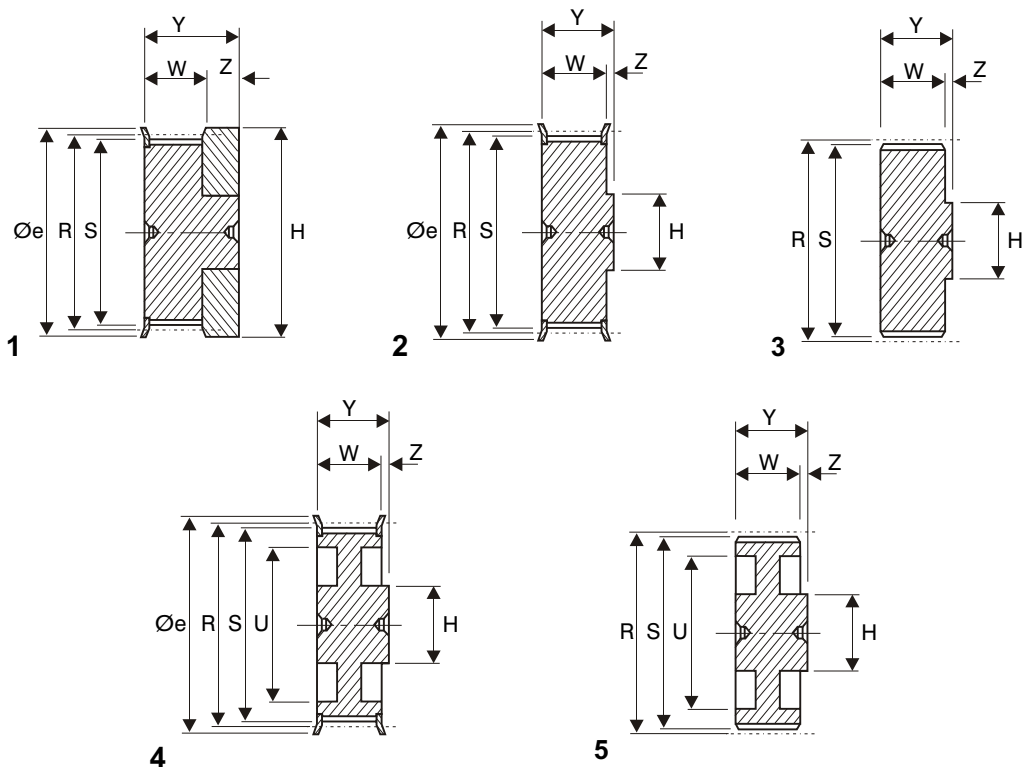

JOCAR TRANSMISIONES S.L.
 c/Lezeaga, 4 48002 Bilbao
 Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com


e-mail: jocar@jocartransmisiones.com

PDM 47 - AT10 (Correa de 32 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
47 AT10/15	15	2	45,90	50,0	32,0	37	47	con valona	Aluminio
47 AT10/16	16	2	49,05	55,0	35,0	37	47		
47 AT10/18	18	2	55,45	62,0	40,0	37	47		
47 AT10/19	19	2	58,60	67,0	44,0	37	47		
47 AT10/20	20	2	61,80	67,0	46,0	37	47		
47 AT10/22	22	2	68,15	73,0	52,0	37	47		
47 AT10/24	24	2	74,55	80,0	58,0	37	47		
47 AT10/25	25	2	77,70	84,0	60,0	37	47		
47 AT10/26	26	2	80,90	88,0	60,0	37	47		
47 AT10/27	27	2	84,10	88,0	60,0	37	47		
47 AT10/28	28	2	87,25	94,0	60,0	37	47		
47 AT10/30	30	2	93,65	98,0	60,0	37	47		
47 AT10/32	32	2	100,00	108,0	65,0	37	47		
47 AT10/36	36	2	112,00	118,0	70,0	37	47		
47 AT10/40	40	4	125,45	129,0	80,0	37	47		
47 AT10/44	44	5	138,00	-	88,0	37	47		
47 AT10/48	48	5	150,95	-	95,0	37	47		
47 AT10/60	60	5	189,10	-	110,0	37	47		
								sin valona	

PDM 66 - AT10 (Correa de 50 mm.)

Código	Nº dientes	tipo	S (mm)	Ø e (mm)	H (mm)	W (mm)	Y (mm)	Valona	Material
66 AT10/15	15	2	45,90	50,0	32,0	56	66	con valona	Aluminio
66 AT10/16	16	2	49,05	55,0	35,0	56	66		
66 AT10/18	18	2	55,45	62,0	40,0	56	66		
66 AT10/19	19	2	58,60	67,0	44,0	56	66		
66 AT10/20	20	2	61,80	67,0	46,0	56	66		
66 AT10/22	22	2	68,15	73,0	52,0	56	66		
66 AT10/24	24	2	74,55	80,0	58,0	56	66		
66 AT10/25	25	2	77,70	84,0	60,0	56	66		
66 AT10/26	26	2	80,90	88,0	60,0	56	66		
66 AT10/27	27	2	84,10	88,0	60,0	56	66		
66 AT10/28	28	2	87,25	94,0	60,0	56	66		
66 AT10/30	30	2	93,65	98,0	60,0	56	66		
66 AT10/32	32	2	100,00	108,0	65,0	56	66		
66 AT10/36	36	2	112,00	118,0	70,0	56	66		
66 AT10/40	40	4	125,45	129,0	80,0	56	66		
66 AT10/44	44	5	138,00	-	88,0	56	66		
66 AT10/48	48	5	150,95	-	95,0	56	66		
66 AT10/60	60	5	189,10	-	110,0	56	66		
								sin valona	

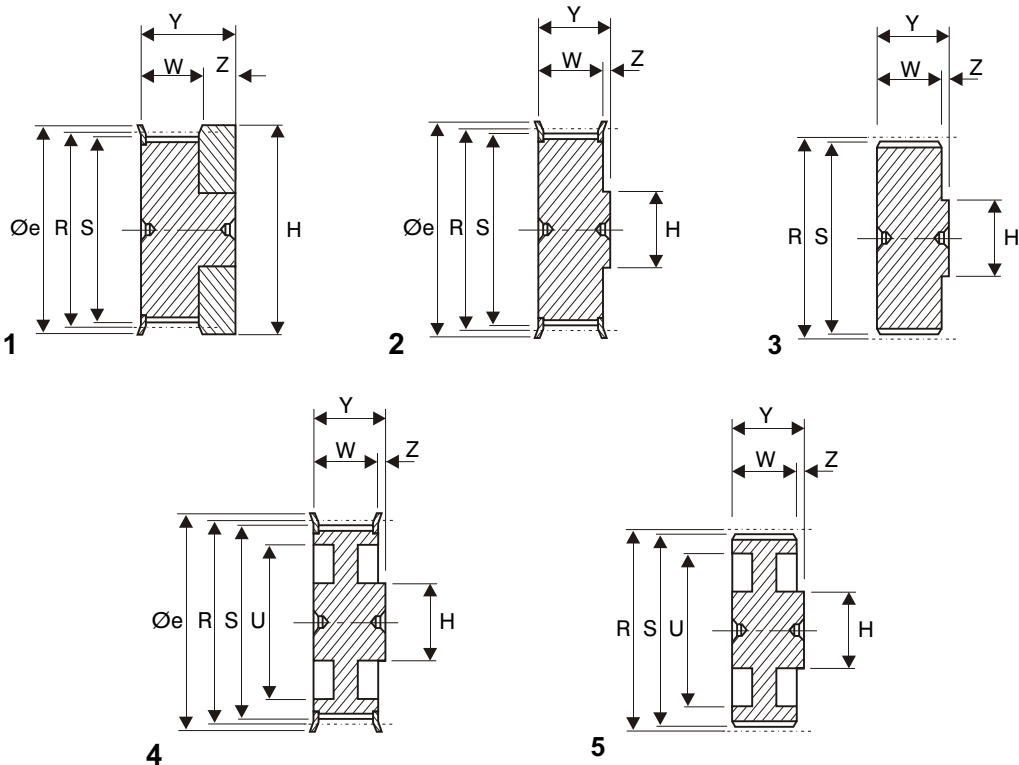

JOCAR TRANSMISIONES S.L.

c/Lezeaga, 4 48002 Bilbao

Tlf 94 427 53 40 Fax 94 427 54 93

www.jocartransmisiones.com

e-mail: jocar@jocartransmisiones.com